




ANTIQUE BUILDING SOLUTIONS

RECLAIMED BUILDING MATERIALS FROM THE SOURCE

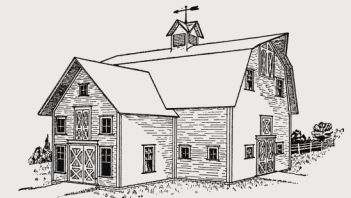

Antique Softwood Thresher Original Face Solid Flooring

PENNSYLVANIA BARNWOOD

For the ultimate rustic finish, our Softwood Thresher flooring comes straight from the barn floor of Pennsylvania barns with little of the original surface removed from individual planks. By often removing only high spots and knots with a light pass of the planer, we leave all of the rustic patina and unique texture in this flooring.

Our wide Softwood Thresher flooring comes from the main parlor floor of barns and has been subject to hundreds of years of hard wear from farm animals, tractors, tools, and even the bare feet of children running around to play hide and seek. Because each barn is unique, each thresher floor installed in a contemporary home is unable to be replicated.

SPECIFICATIONS & UNIQUE FEATURES

Species:	Eastern White & Yellow Pine and Eastern Hemlock	Finish:	Original natural surface. Pre-finish options are available.
Source:	Historic Barn Floors of Pennsylvania	Moisture Content:	Kiln dried 6-9% prior to shipment/milling.
Color:	Tones may range from blond tan to grey to rich coffee brown. Reclaimed products may exhibit an indefinite range of color variations.	Knots:	There are no restrictions on the presence of sound knots.
Original Edge Dimensions:	N/A	Texture:	Various saw blade textures, animal wear, beetle tracking, hardware & fastener impressions.
Common Dimensions:	Height 5/8" & 3/4" Width 5,6,7,8" 7,8,9,10" Length 3-12'	Voids:	Chips & open knots with a diameter of up to 1" may be present. In some cases, larger voids may be included to maintain the board's length.
Rare/Custom Dimensions:	Height 1.5" Width 11,12,13,14" Length Singular or 12'+	Discoloration:	There is no limit to the amount of natural weather & mineral staining.
		Checks:	Structural checks that do not compromise the plank's integrity after installation are permissible and tend to be more common as the material's width increases.

For more products and photos visit:
<https://www.antiquebuildingsolutions.com>

TIPS FROM THE MILL

- If you are installing wide thresher, we suggest a nail and glue down. Bostik's BEST makes a great adhesive with a moisture vapor barrier.
- When doing a topside nail, it is best to glue and screw. Once glue has cured, back out screws and replace with desired cut nails.
- Due to variations in height of these planks, it is best to use a floor sander to soften the boards and ease toe catchers after the floor is installed and before finishing.
- Ask us about matching stair parts, registers, & transitions. We offer all standard nosing, returns, risers, stringers, & landing treads.

CUSTOM MILLING OPTIONS



NEED A QUOTE? WE'LL NEED SOME DETAILS.

- How much square footage do you need for this project?
 - We suggest 10-15% overage for waste & fall off.
- What widths & lengths do you need? Wider or singular widths and longer lengths possess a higher level of rarity & increased investment.
- What thickness would you like?
 - 3/4" is suggested for Thresher Flooring due to its wider widths and variations in surface height
- Would you like a milled profile or straight edge? Straight Edge is suggested due to the variation in surface height. (End Matching is not offered on material that is 11" or wider. Material is back relieved up to 12")
 - Straight Edge (SLR)
 - Tongue & Groove (T&G)
 - Eased Edge (EE)
- How are you planning on shipping the material? Whether its LTL, Hot-shot or Full Truckload, we can assist with set-up.

Tip - You can create an original edge look by easing/texturizing the edges & naturally or lightly staining them.