




ANTIQUE BUILDING SOLUTIONS

RECLAIMED BUILDING MATERIALS FROM THE SOURCE

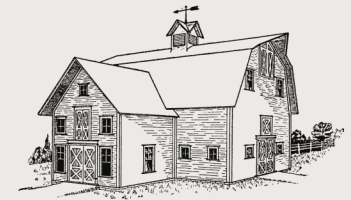

Wide White Pine Distressed Solid Flooring

PENNSYLVANIA BARNWOOD

These Eastern White Pine planks were carefully selected from centuries-old Pennsylvania siding then planed to perfection. The "soft" in "softwood" speaks to the nature of these wood types and their tendency to keep a record of its past uses, marking bruises, and chips with unparalleled appeal. As we like to think, the more softwood is used, the more beautiful it becomes.

Our old-growth softwood includes characteristics that cannot be found in modern softwood that is rapidly grown in tree farms. Centuries ago when our old-growth softwood was standing, the trees of the dense virgin forests were fighting over resources and growing at a much slower rate, ensuring tighter grain and durability unmatched by modern softwood.

SPECIFICATIONS & UNIQUE FEATURES

Species:	Eastern White Pine	Finish:	Unfinished. Pre-finish options are available.
Source:	Historic Structures of Pennsylvania	Moisture Content:	Kiln dried 6-9% prior to shipment/milling.
Color:	Tones may range from light pale yellow to warm grey to rich coffee brown. Reclaimed products may exhibit an indefinite range of color variations.	Knots:	There are no restrictions on the presence of sound knots.
Original Edge Dimensions:	N/A	Texture:	Smooth with occasional saw blade textures, weather checking, beetle tracking, hardware & fastener impressions.
Common Dimensions:	Height 5/8" & 3/4" Width 5,6,7,8" 7,8,9,10" Length 2-12'	Voids:	Chips & open knots with a diameter of up to 1" may be present. In some cases, larger voids may be included to maintain the board's length.
Rare/Custom Dimensions:	Height N/A Width Singular 5, 7, 9" Length Singular or 12'+	Discoloration:	There is no limit to the amount of natural weather & mineral staining.
		Checks:	Structural checks that do not compromise the plank's integrity after installation are permissible and tend to be more common as the material's width increases.

For more products and photos visit:
<https://www.antiquebuildingsolutions.com>

TIPS FROM THE MILL

- If you are installing material 7" or wider, we suggest a nail and glue down. Bostik's BEST makes a great adhesive with a moisture vapor barrier.
- When including a pre-finish to any flooring, a micro bevel is required to keep the finish from standing proud on the edges.
- Ask us about matching stair parts, registers, & transitions. We offer all standard nosing, returns, risers, stringers, & landing treads.

CUSTOM MILLING OPTIONS



NEED A QUOTE? WE'LL NEED SOME DETAILS.

- How much square footage do you need for this project?
 - We suggest 10-15% overage for waste & fall off.
- What widths & lengths do you need? Wider or singular widths and longer lengths possess a higher level of rarity & increased investment.
- What thickness would you like?
 - 5/8" allows the mill to choose from a larger range of material, in certain instances, decreasing lead time.
- Would you like a milled profile or straight edge?
 - Straight Edge (SLR)
 - Tongue & Groove (T&G)
 - End-Matched (EM) *10" Max
 - Micro Bevel (MB)
 - Eased Edge (EE)
- How are you planning on shipping the material? Whether its LTL, Hot-shot or Full Truckload, we can assist with set-up.

Tip - You can create an original edge look by easing/texturizing the edges & naturally or lightly staining them.

