




ANTIQUE BUILDING SOLUTIONS

RECLAIMED BUILDING MATERIALS FROM THE SOURCE

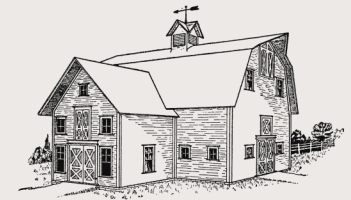

Historic Softwood Weathered Barn Siding

PENNSYLVANIA BARNWOOD

No two planks of Weathered Barn Wood siding are the same because this barn wood carries the characteristics of the elements specific to its unique place, time, and journey. Our weathered siding is sourced from Pennsylvania barns located on hills and in valleys. Some are covered in ivy; others experience the harshness of three seasons in one day. Multiply those conditions by 200 years, and the result is weathered siding.

Weathered siding boasts a blend of textures and colors that range from cool grey to warm brown and rich black. Weathered to rustic perfection, this barn wood cannot be replicated artificially and provides a one-of-a-kind look to siding, paneling, wall and ceiling cladding, as well as soffit.

SPECIFICATIONS & UNIQUE FEATURES

| | | | |
|----------------------------------|--|--------------------------|---|
| Species: | Eastern White Pine, Hemlock and Yellow Pine | Finish: | Original surface. Matte sealer can be applied to hold color. |
| Source: | Historic Structures of Pennsylvania | Moisture Content: | Kiln dried 6-9% prior to shipment/milling. |
| Color: | Tones may range from light to dark grey to smokey brown & black. Reclaimed products may exhibit an indefinite range of color variations. | Knots: | There are no restrictions on the presence of sound knots. |
| Original Edge Dimensions: | N/A | Texture: | Coarse grain patterns, pronounced knots & weathered checks. |
| Common Dimensions: | Height 1/2 - 5/8" Width 3,4,5,6" 4,5,6,7" 5,6,7,8" 7,8,9,10" Length 3-12' | Voids: | Chips & open knots with a diameter of up to 1.5" may be present. In some cases, larger voids may be included to maintain the board's length. |
| Rare/Custom Dimensions: | Height 3/4" (1" not optional) Width Singular 5, 7 or 9" Length Singular or 12'+ | Discoloration: | There is no limit to the amount of natural weather & mineral staining. |
| | | Checks: | Structural checks that do not compromise the plank's integrity after installation are permissible and tend to be more common as the material's width increases. |

For more products and photos visit:
<https://www.anticuebuildingsolutions.com>

TIPS FROM THE MILL

- When installing on walls & ceilings, use black underlayment to hide voids/open knots.
- If installing outside, use a matte black UV-Protected rain-screen system. We suggest Benjamin Obdyke. To seal in the natural color & protect the wood from UV and moisture damage, use an ultra matte or dead flat exterior sealer. We suggest Modern Masters Dead Flat Exterior Varnish.

CUSTOM MILLING OPTIONS



NEED A QUOTE? WE'LL NEED SOME DETAILS.

- How much square footage do you need for this project?
 - We suggest 10-15% overage for waste & fall off.
- What widths & lengths do you need? Wider widths and longer lengths possess a higher level of rarity & increased investment.
- What thickness would you like?
 - Due to natural weathering, this material is thinner by nature & can be back planed to 1/2" or 5/8" | 5/8" allows the mill to choose from a larger range of material, in certain instances, decreasing lead time.
- Would you like a milled profile or straight edge? Original edge is very challenging due to variation in width & rarity of clean straight edges in reclaimed material.
 - Straight Edge (SLR)
 - Tongue & Groove (T&G)
 - Ship Lapped (SL)
- How are you planning on shipping the material? Whether its LTL, Hot-shot or Full Truckload, we can assist with set-up.

Tip - You can create an original edge look by easing/texturizing the edges & naturally or lightly staining them.